


# Safe-T-Guard 2000

Corrosion and Scale Inhibitor  
Type DCA2 Supplemental Coolant  
Additive



REDUCES SCALE | ELIMINATES CORROSION

SAFE-T-GUARD 2000 contains specially selected inhibitors to protect cooling systems by creating and maintaining clean heat transfer surfaces.

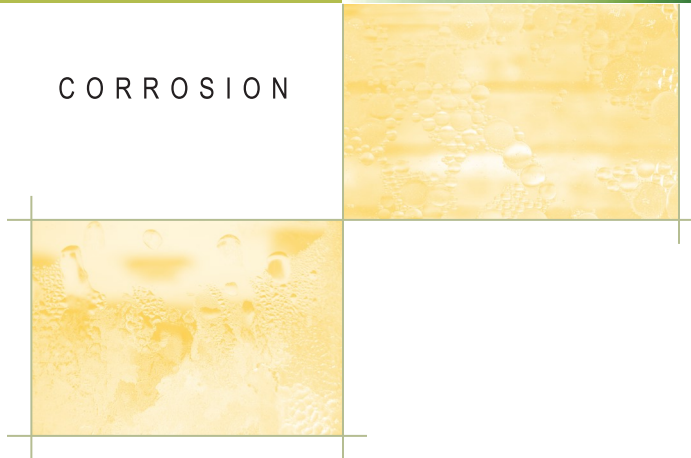

## PERFORMANCE PROPERTIES

- Prevents Overheating
- Designed For Cast Iron Diesel Engine Cooling Systems
- Protection Against Mineral Scale And Sludge Formation
- Effective On Liner Pitting And Erosion Caused By Cavitation
- Will Not Harm Hoses, Diesel Liner Seals Or 'O' Rings
- Can be diluted as much as 1 part lubricant to 4 parts water

SAFE-T-GUARD 2000 utilizes non-precipitating corrosion inhibitor chemistry making it a leader in the North American market and exceeds all European specifications for non-precipitation.

SAFE-T-GUARD 2000 meets GM Specification #6038 which helps prevent the formation of "silicate gels", a leading cause of improper heat transfer that causes overheating and engine damage.

SAFE-T-GUARD 2000 has no government agency reporting requirement because it contains no heavy metals or other toxic ingredients and utilizes environmentally safe chemistry.

**SAFE-T-GUARD 2000** is offered in 275 gallon tote tanks, 55 gallon drums, and 5 gallon pails.



**RELIANT TECHNOLOGIES**

local | quality | service

2933 HWY 1 North  
Port Allen, LA 70767

Phone: 225 383 7923 | Fax: 225 383 7961  
ReliantLubrication.com