

AK-47

Grease Buster



POWERFUL | EFFICIENT | BIODEGRADABLE

AK-47 is highly alkaline water soluble liquid cleaning compound which is specifically designed for industrial applications which require an extremely powerful, yet biodegradable, cleaner. It contains no halogenated compounds, heavy metals, nor any toxic components. AK-47 Grease Buster is designed to function in both hot and cold water depending on the particular application.

AK-47 Grease Buster is being successfully used in the removal of animal fats and cooking greases. It has demonstrated its value in the clean-up of these soils by professional grease-hood cleaning services as well as transporters and processors of used grease and animal by-products. Since it is safe for use on both stainless steel as well as mild steel alloys, it is ideal to clean all storage, processing, and transportation equipment associated with the spent grease collection industry.

AK-47 Grease Buster is also being used as an internal cleaning tank agent to remove oils, greases, solvents, and other petroleum products from the interior of tank trailers. In this application, AK-47 Grease Buster is used either in its neat form or diluted with water, heated in excess of 160° F, and applied through a "Butterworth" or other type of spin washer system. It may be necessary to add a small amount of defoamer to the use vessel in this application.

AK-47 is offered in 275 gallon tote tanks, or 55 gallon drums.




RELIANT TECHNOLOGIES

local | quality | service

AK-47 Should Not Be Used On Aluminum.

2933 HWY 1 North
Port Allen, LA 70767

Phone: 225 383 7923 | Fax: 225 383 7961
ReliantLubrication.com

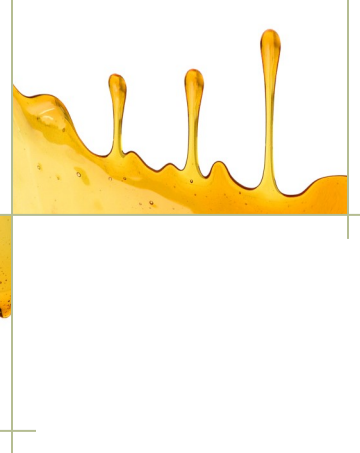

AK-47

CAUTION:

AK-47 GREASE BUSTER SHOULD NOT BE USED UNDILUTED TO CLEAN ALUMINUM TRAILERS OR EQUIPMENT, BECAUSE OF ITS EXTREMELY HIGH ALKALINITY. A MINIMUM OF 1 PART AK-47 GREASE BUSTER TO 9 PARTS OF WATER IS SUGGESTED AS A STARTING POINT TO DETERMINE THE PROPER DILUTION FOR THIS SITUATION. THIS PRODUCT CONTAINS SODIUM HYDROXIDE WHICH MAY CAUSE BURNS AND PERMANENT DAMAGE TO SKIN AND EYES. USE PROPER SAFETY EQUIPMENT AT ALL TIMES AND USE THIS PRODUCT ONLY AFTER READING THE MATERIAL SAFETY DATA SHEET THOROUGHLY.

USES

Average Cleaning: Exhaust Stack Smoke • Bilges • Algae • Mold • Mildew • Water-line Scum • Shop Floors and Walls • Vinyl • Decks • Air Conditioning Condensers and Filters • Bathroom Facilities

Apply product, allow 1-3 minutes penetration time, brush severe spots, rinse thoroughly with water to 5 parts water up to 1 part AK-47 to 30 parts water directly into mixing tank.

Heavy Cleaning: Degas Tank and Barge Compartments • Engine Rooms Oil-Stained Concrete • Ramps • Decks • Platforms • Fireplace Soot Shellac • Bulkheads • Creosote • Petroleum Drilling Muds

Apply product, allow 1-3 minutes penetration time, brush severe spots, rinse thoroughly with water.

Severe Cleaning: No. 6 Crude • Engines • Holding Tanks • Grease Traps • Engine Head Carbon • "Black Magic" and other oil based muds.

Scrape unusual buildup, apply product, allow 1-3 minutes penetration time, brush severe spots, rinse thoroughly with water.

Steam and High Pressure Washing: Put pick-up tube in concentrate and meter properly, or add pre-mixed solution of 1 part AK-47

MIXING INSTRUCTIONS

TYPE OF CLEANING	RATIO OF AK-47 TO WATER
Average Cleaning	1 Part AK-47 : 15 to 25 Parts of Water
Heavy Cleaning	1 Part AK-47 : 5 to 10 Parts of Water
Severe Cleaning	1 Part AK-47 : 1 to 5 Parts of Water
Steam/High Pressure Washing	1 Part AK-47 : 5 to 200 Parts of Water

2933 HWY 1 North
 Port Allen, LA 70767

Phone: 225 383 7923
 Fax: 225 383 7961
 ReliantLubrication.com